

Find. Identify. Respond.



RadEye SPRD-ER Spectroscopic Personal Radiation Detector



Advetage Solutions LLC is an authorized reseller for Thermo Fisher Scientific. For more information, contact us or visit us online. Phone: (310)563-3804 | Email: info@advetage.com | www.advetage.com

advetage solutions

ThermoFisher SCIENTIFIC

Whatever your mission, the SPRD-ER has you covered

The Thermo Scientific™ RadEye™ SPRD-ER personal radiation detector simplifies your mission. By providing significant detector sensitivity for search and find, combined with accurate high radiation dose rate measurement, the SPRD-ER is suitable for all users and may be the only radiation device you need. Additionally, the SPRD-ER identifies the nature of the discovered material in a manner configurable for your operation or user skills – from simple artificial vs. natural distinction; to industrial, SNM, and medical classification; to full spectroscopic analysis.

Ensure safety - extremely high dose rate measurement and accuracy

- Extremely high dose rate measurement capabilities of ≤ 1000 R/h (< 10 Sv/h) supports users with one unit for search, find, identification and response missions.
- Unprecedented dose rate accuracy across the full spectrum of 58 keV - 6 MeV
- New highly sensitive alarm for artificial gamma (S-Alarm) extra sensitivity in the range of 90 - 450 keV for effective detection of SNM materials
- Sourceless detector gain stabilization improves identification selectivity and accuracy across the spectrum in varying environmental conditions.

Stay on mission - detect radiation at greater distances

- Advanced NBR identifies artificial radiation while minimizing false alarms

Respond swiftly - faster discrimination and adjudication of potential threats

- (SNM, Industrial) and non-threat sources (medical or natural)
- Neutron indication via proven prompt gamma analysis

Effortless deployment

- Simplified ID capability for novice to advanced users
- Multiple modes of operation, easily configured to best align with radiation detection operating procedures



Easy information. Smarter decisions.

- Large display with improved screen resolution and brightness
- No retraining or relearning for infrequent users
- Get results automatically, without the need to press buttons
- Quickly guides you through next steps after an alarm
- Simple 4 button design
- Comprehensive data neatly organized and presented on screen
- Bluetooth™ - integration with iOS™ and Android™ devices
- RadResponder iOS and Android phone apps compliant
- Easy-to-use configuration tool for small and large organizations
- No license required field test adapter for performance and measurement verification



Ease of use


Configure the RadEye SPRD-ER as a simple 0 to 9 radiation level gauge. Or turn on dose rate readings, simplified gamma ID classification, or full spectroscopic capabilities.

Agencies have seen nuisance alarms reduced by 80% as a result of concentrated NORM materials such as granite, natural stone and subway tiles after deploying instruments that utilize our Natural Background Rejection (NBR) Technology.

The patented Natural Background Rejection algorithm (NBR), allows the RadEye SPRD-ER to immediately separate man-made (non-NORM) gamma radiation from natural background fluctuations in real-time during operation. When enabled, the RadEye SPRD-ER automatically classifies and identifies gamma radiation as a result of an NBR alarm.


Without NBR

- Higher threshold for alarm
- Numerous alarms, most due to natural radiation
- Nuisance for operator, may ignore

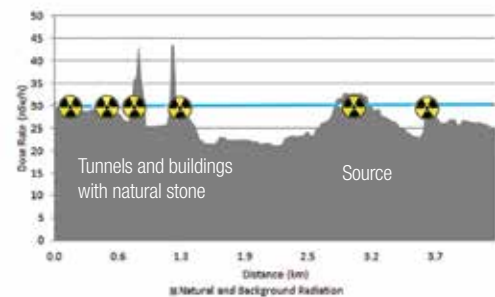

With NBR

- Lower threshold for alarm
- No false alarms
- Only alerts to artificial sources
- Operator knows to act

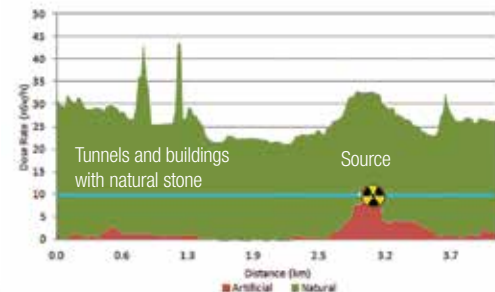



Rugged and practical

- Can be worn in a holster or on a standard service belt
- Small and lightweight for easy handling and increased mobility
- Long battery life
- Drop resistant to 1.5m
- IP65 Rating easily decontaminated
- Can be operated in extreme temperatures

“The SPRD-ER offers increased protection for personnel. The higher range capability protects responders when entering high dose rate scenarios.”

| RadEye SPRD-ER Specifications | | |
|---|--|--|
| Radiation detected and analyzed | Gamma and X-rays plus neutrons via prompt gamma | |
| Number of detectors | 2 | |
| Low dose rate / Search / ID detector | | |
| Material | CsI(Tl) | |
| Sensitivity (662 keV) | 200 cps per μ Sv/h | |
| Spectroscopic energy range | 20 keV - 3 MeV | |
| Typical ID-time at 1 μ Sv/h (100 μ R/h) | < 3 min | |
| Energy range | 58 keV to 6 MeV | |
| Dose rate range | 10 nSv/h - 250 μ Sv/h (1 μ R/h - 25 mR/h) | |
| NBR (Natural Background Rejection) | Advanced algorithms | |
| Neutron detection and verification | Prompt gamma analysis | |
| Continuous Gain Stabilization | Sourceless spectral algorithm | |
| Fast Gain Verification and Adjustment | Lutetium Testadapter (< 10 nCi Lu-176) | |
| High dose rate detector (patent pending) | | |
| Material | Scintillator | |
| Sensitivity (662 keV) | 25 cps per mSv/h (0.25 cps per mR/h) | |
| Energy range | 58 keV to 6 MeV | |
| Dose rate range | 250 μ Sv/h - 10 Sv/h (25 mR/h - 1000 R/h) | |
| General Specifications | | |
| Battery type | 2 x AAA alkaline or NiMH | |
| Battery Life | > 170 h (alkaline) | |
| Weight including Batteries and Rubber Sleeve | 195g | |
| Water/Dust Rating | IP 65 | |
| Drop tested | 1.5 m on concrete (with rubber sleeve) | |
| Operating Temperature | -4°F to 122°F (-20°C to 50°C) | |
| Dimensions | 4.1 x 2.6 x 1.6 inches (with rubber protective sleeve) | |
| Wireless Communications | Bluetooth 4.2 (Option) | |
| Wired Communications | USB to IR | |
| Standards Compliance | Low dose rate range | <ul style="list-style-type: none"> • ANSI N42.32 PRD standard fully compliant • ANSI N42.48 SPRD standard fully compliant |
| | High dose rate range | <ul style="list-style-type: none"> • ANSI N42.33 for high range dose rate detector • IEC 60846-1 for high range dose rate detector |
| Ordering information | | |
| 4250825 | RadEye SPRD-ER personal radiation detector | |
| 425082541 | RadEye SPRD-ER-KIT, contains 1 ea. RadEye SPRD-ER, Lutetium Test Adapter, Desktop Holder + USB connection cable, Software package RadEye.exe + RadEyeSpectra, Holster and spare AAA batteries | |
| 425082542 | RadEye SPRD-ER Vehicle Kit, contains 1 ea. RadEye SPRD-ER, Lutetium Test Adapter, Vehicle charging kit, Bluetooth adapter, Software package RadEye.exe + RadEyeSpectra, Holster and spare AAA rechargeable batteries | |

Advetage Solutions LLC is an authorized reseller for Thermo Fisher Scientific
 For more information, contact us or visit us online.